


Installation Instructions
PISA LED





220-240V/50-60Hz LED

Power	Luminaire's dimensions and weight (Dimensions of the installation hole)				
	295x595 (280x580)	595x595 (580x580)	622x622 (605x605)	295x1195 (280x1180)	595x1195 (580x1180)
10W, 17W	2,7kg	-	-	-	-
18W, 31W	-	4,5kg	4,9kg	5,3kg	-
34W, 60W	-	-	-	-	9,2kg


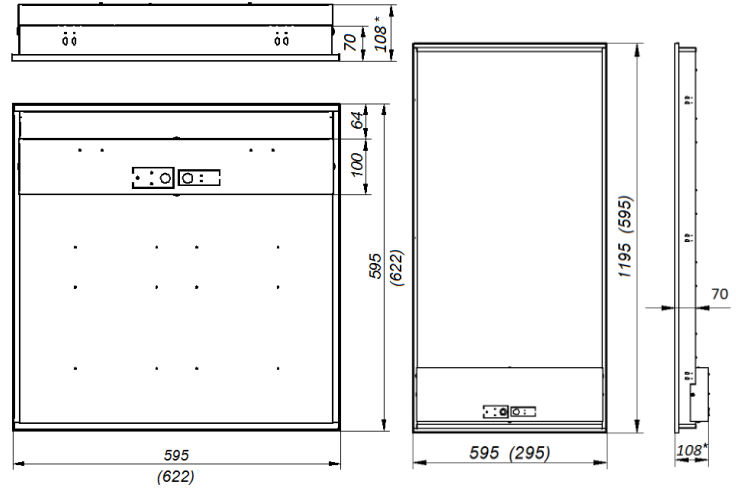


The luminaire's height 108* is for the version with an emergency module.

Power	Luminaire's dimensions and weight (Dimensions of the installation hole)		
	180x595 (155x580)	180x1195 (155x1180)	295x295h89 (280x280)
17W	1,5kg	-	-
19W	-	-	2,0kg
32W	-	2,7kg	-

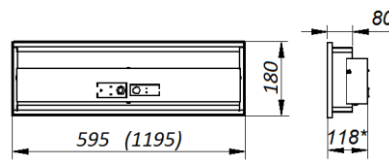

- Deactivate power in the circuit which the luminaire is going to be connected to.
- Carefully take the luminaire out of the package.
- Ceiling mounting:**
 - cut out an installation hole in the ceiling with the dimensions given in the box above,
 - tilt back the plate with the connection block,
 - pull the feeding cable through the gland,
 - connect the feeding cable as indicated on the connection block,
 - tilt back the springs on the sides of the luminaire and install the device in the ceiling.

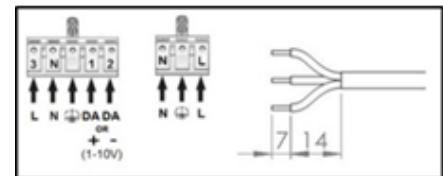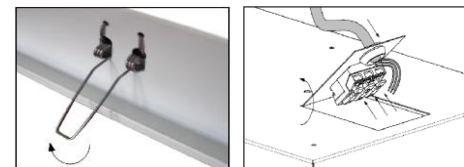

Light source used in this luminaire should be changed by the producer or its service representative or similarly qualified person.

Important warnings:

- the luminaire may be connected to the mains only by authorized personnel,
- any manipulation inside the luminaire when the power is activated causes the risk of electric shock,
- the manufacturer cannot be held responsible for any flaws resulting from non-compliance with these instructions,
- the manufacturer reserves the right to change the construction of the product,
- do not install the luminaire in places without sufficient air circulation,
- in order to guarantee safe luminaire's functioning, please follow the installation instructions.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must not be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remind obligations towards separate collection. For correct disposal, please use authorized waste disposal facilities or return to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting to the environment. Unauthorized disposal of the foregoing waste material is punishable by law. For the Directive details please visit: <http://eur-lex.europa.eu/legal-content/en/ALL/?uri=CELEX:32002L0096>

