



## Bari ECO DLN IP65 LED



BARI ECO DLN IP65 LED extends the family of BARI ECO LED luminaires designed for ceiling mounting. Thanks to its impressive lighting performance and universal form, it can be used in most rooms where increased IP protection degree is required.

**Materials:** powder painted white aluminum ring and housing; OPAL diffuser, tempered glass. Reflector made of aluminum with a purity of 99.85%

**Installation:** surface mounted

**Power:** 230V

### ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

### MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Aluminum

### INFORMATION

Colour	White
Operating temperature range	-20 ... 40 °C

### CERTIFICATES

Degree of protection (IP)	IP65
Class of protection	I
Energy class	A
CE	Yes
EAC	Yes

### LIGHT DATA

Light colour	White
Color rendering index	84
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	86 %


### OPTICAL DATA

Diffuser material	Transparent glass
Reflector	High gloss

## AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature
PX1487301	10	1140	114	3000K
PX1487308	10	1160	116	4000K
PX1487315	15	1560	104	3000K
PX1487322	15	1590	106	4000K
PX1487329	19	1990	105	3000K
PX1487336	19	2030	107	4000K
PX1487343	28	2690	96	3000K
PX1487350	28	2750	98	4000K

## DIMENSIONS

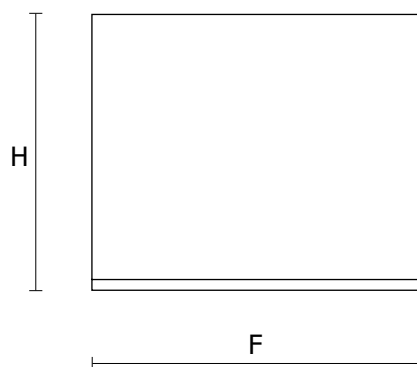

H [mm]	F [mm]
188	245

H = Height / Depth | F = Outer diameter