

Installation manual

VIP



IP20




**VIP MASTER PANEL NT**  
**VIP MASTER PANEL GK**




**1. Weight, dimensions, mounting holes**

VIP MASTER PANEL NT	Light source	Function	Time of work	Weight
	18xLED	NM	3,0h	1,7kg
	18xLED	M	3,0h	1,7kg
	18xLED	NM AT	3,0h	1,7kg
	18xLED	M AT	3,0h	1,7kg
	18xLED	NM DATA-S	3,0h	1,7kg
	18xLED	M DATA-S	3,0h	1,7kg
	18xLED	MAINS	Nie dotyczy	1,5kg


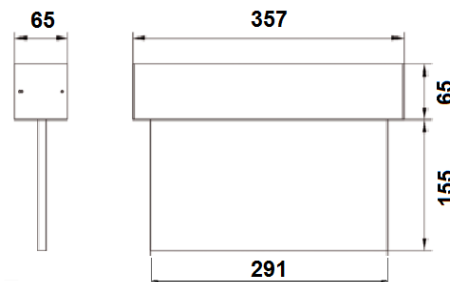


VIP MASTER PANEL GK	Light source	Function	Time of work	Weight
	18xLED	NM	3,0h	1,7kg
	18xLED	M	3,0h	1,7kg
	18xLED	NM AT	3,0h	1,7kg
	18xLED	M AT	3,0h	1,7kg
	18xLED	NM DATA-S	3,0h	1,7kg
	18xLED	M DATA-S	3,0h	1,7kg
	18xLED	MAINS	Nie dotyczy	1,5kg

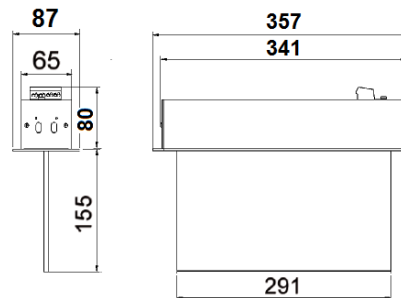

**2. Assembly**

- open the side plate of the luminaire with a „OPEN THIS SIDE” sticker
- carefully take out the plate with electronics
- connect the batteries to the electronic ballast
- pull the feeding wire through the rubber gasket in the back of the fixture (for the NT version)
- connect the power supply:
  - connect the wires as shown on a cube

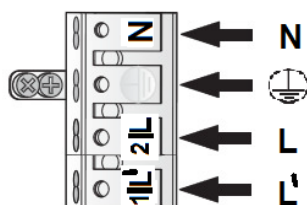

**f1) installation on the wall/ceiling**

- install the mounting brackets on the wall/ceiling
- level the fixture at the screwed handles wall/ceiling
- screw the plate with the „OPEN THIS SIDE” sticker on

**f2) installation in the GK (gypsum plasterboard) ceiling:**

- put the fixture into the previously prepared mounting hole, cut in the dimensions shown on the picture in the Point 1

**g) recessed installation:**

- screw the regulators from the universal/electrical suspension on to the suspension brackets
- put the brackets with a regulators on the back of the fixture
- screw the universal suspension on to the ceiling
- screw the plate with the „OPEN THIS SIDE” sticker on
- delicately loosen the outer regulator nut
- push the line in until the needed height will be reached and tighten the nut
- to lower the luminaire, loos the nut again and push it towards the Luminaire, line will come out



**3. Important warnings:**

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaires may be installed by qualified personnel only.

Any manipulation inside the luminaire when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws caused by avoid using this manual.

Manufacturer reserves a right to change the construction of the product.

Do not assembly in places without air circulation.

To guarantee safety of fixture functions, please assembly according to instruction.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

