

Cubic Q Wall IP54



Bracket for GU10, G9 LED lamps. Luminaire with subtle design for illumination of covered facades and representative rooms. Possibility of painting in any RAL colour.

исполнение: Electrostatically painted aluminium housing (standard colour: anthracite), OPAL diffuser made of plastic. Recommended use of LED bulbs adapted to 230V power supply. Light source not included.

монтаж: Wall mounted

блок питания: 230V

МЕХАНИЧЕСКИЕ ДАННЫЕ

материал базы	алюминий
---------------	----------

ИНФОРМАТИЧЕСКИЕ ДАННЫЕ

Цвет инфо	Антрацит max. 10W LED
-----------	--------------------------

СЕРТИФИКАТЫ И ОБОЗНАЧЕНИЯ

класс IP	IP54
CE	Да


ОПТИЧЕСКИЕ ДАННЫЕ

Louver/ shutter	OPAL
-----------------	------

ИСПОЛНЕНИЯ

Код продукта	светильник	распределение света
PX4113001 EJ001.4411.000.0000	GU10	поток света в низ
PX4113008 EJ002.4411.000.0000	G9	поток света в низ и вверх



РАЗМЕР

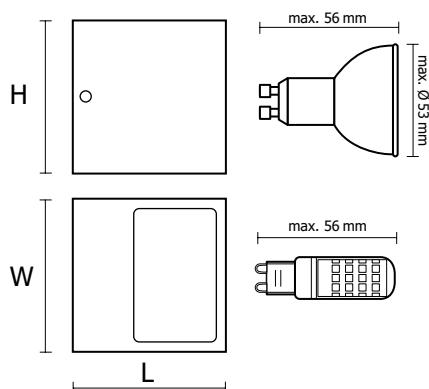

L [mm]	W [mm]	H [mm]
100	100	100


L = Длина | W = ширина | H = высота / глубина

CUBIC Q WALL IP54 DI-IN

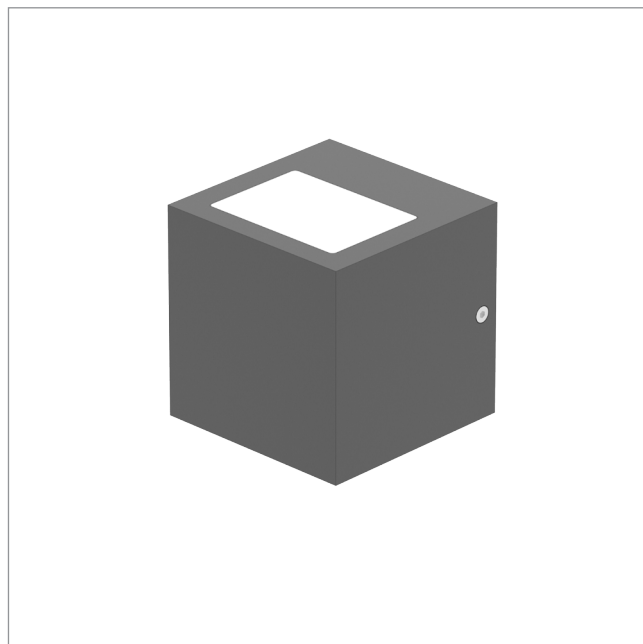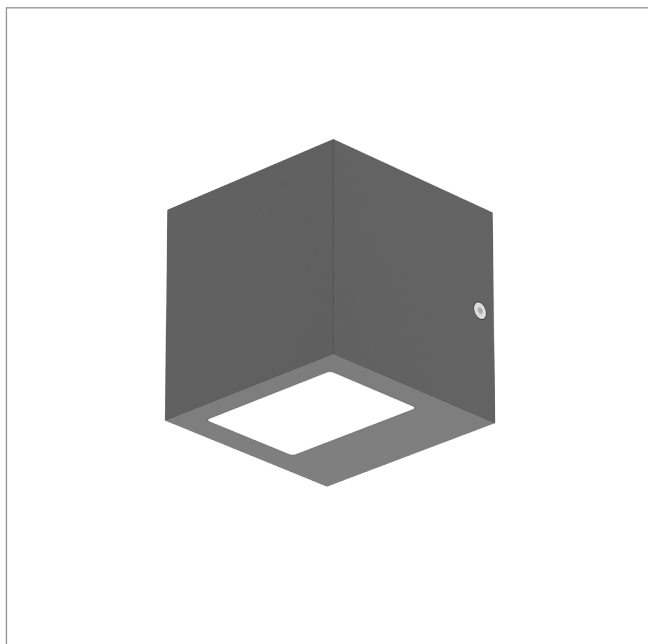


CUBIC Q WALL IP54

CUBIC Q WALL IP54 DI-IN

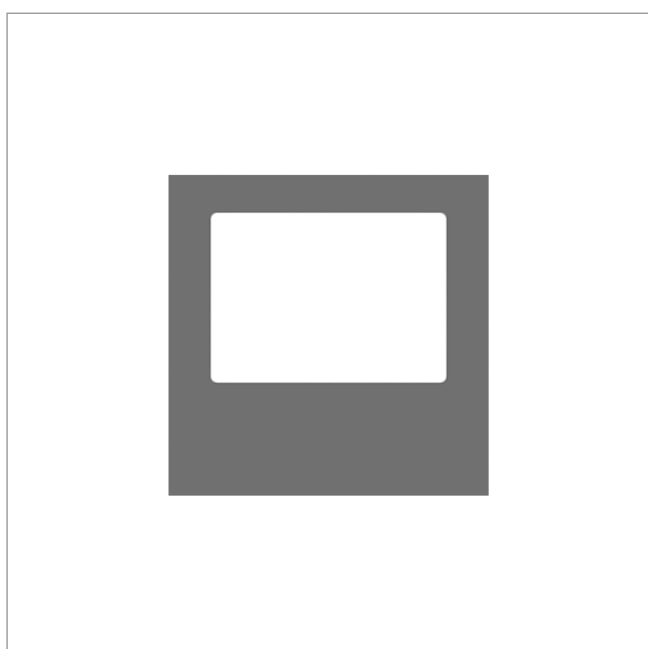

CUBIC Q WALL IP54 DI

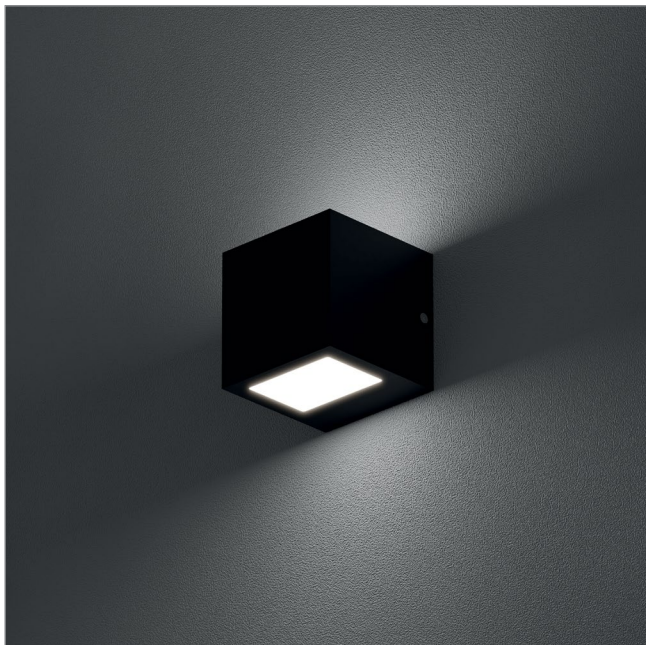

CUBIC Q WALL IP54 DI-IN

