



## Finestra Q IP44 LED



Energy-saving decorative lighting luminaire of modern and elegant shape equipped with LED light source from renowned producers. FINESTRA Q LED by universal form and type of assembly is suitable for public spacer, conference rooms, offices, communications, halls, stairways. The first-class AC power supply of renowned brands achieves  $\cos \phi > 0,96$ . This luminaire perfectly complements to the rest of the Finestra series of luminaires.

**Materials:** Steel sheet body, electrostatically painted (standard color: grey) OPAL diffuser.

**Installation:** Surface mounted, wall mounted, suspended

**Accessories:** Simple and electric suspension

**Power:** 230V

### ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.96

### MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet
Electrical track connection	No

### INFORMATION

Colour	Grey
Operating temperature range	-20 ... 40 °C

### CERTIFICATES

Degree of protection (IP)	IP44
Class of protection	I
CE	Yes
HACCP+	Yes
Power Flicker	=< 3%

### LIGHT DATA

Light colour	White
Color rendering index	84
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

### OPTICAL DATA


Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal plastic

### AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info	Weight [kg]
EL001.2211.830.A000 PX0906596	18	1960	109	3000K	-	2.30
EL001.2211.840.A000 PX0906598	18	2020	112	4000K	-	2.30

## AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info	Weight [kg]
EL002.2211.830.A000 PX0906610	23	2760	120	3000K	-	2.80
EL002.2211.840.A000 PX0906611	23	2850	124	4000K	-	2.80
EL002.2211.830.A001 PX0906612	23	2760	120	3000K	Motion sensor	2.80
EL002.2211.840.A001 PX0906613	23	2850	124	4000K	Motion sensor	2.80
EL003.2211.830.A000 PX0906623	28	3310	118	3000K	-	3.50
EL003.2211.840.A000 PX0906624	28	3310	118	4000K	-	3.50
EL004.2211.830.A000 PX0906625	36	4250	118	3000K	-	3.50
EL004.2211.840.A000 PX0906626	36	4380	122	4000K	-	3.50

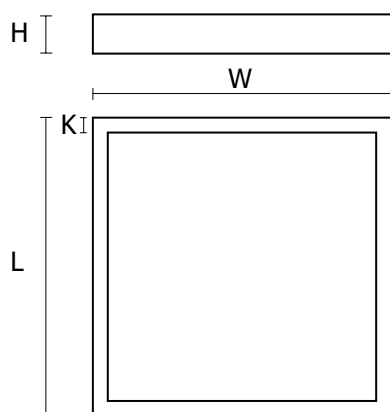

## DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]	K [mm]
EL001.2211.830.A000 PX0906596	307	307	65	25
EL001.2211.840.A000 PX0906598	307	307	65	25
EL002.2211.830.A000 PX0906610	407	407	65	25
EL002.2211.840.A000 PX0906611	407	407	65	25
EL002.2211.830.A001 PX0906612	407	407	65	25
EL002.2211.840.A001 PX0906613	407	407	65	25
EL003.2211.830.A000 PX0906623	595	295	65	25
EL003.2211.840.A000 PX0906624	595	295	65	25
EL004.2211.830.A000 PX0906625	595	295	65	25
EL004.2211.840.A000 PX0906626	595	295	65	25

L = Length | W = Width | H = Height / Depth | K = Additional dimension