



Finestra Ring LED



Universal plafond for LED light sources.

Materials: Powder painted housing made of aluminum profile (standard color: grey), base made of steel sheet, OPAL diffuser (PMMA) or microprismatic MPRM diffuser.

Installation: Surface mounted, suspended, with G/K adapter into plaster-cardboard ceiling (only 320, 440, 520 versions)

Accessories: Suspension set 3x, uspensions simple and electric, G/K adapter for plaster-cardboard ceiling (except version 630mm, 800mm and 1065mm)

Note: suspended version 320mm and 440mm, 520mm, 630mm: suspension set "3x"suspended version 800mm and 1065mm: 3pcs. simple and 1pcs. electrical suspension

Power: 230V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

MECHANICAL DATA

Type of installation	Universal
Housing material	Aluminum

INFORMATION

Colour	Grey
--------	------

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
EAC	Yes
Power Flicker	=< 3%

LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

OPTICAL DATA


Diffuser colour	Transparent
-----------------	-------------

AVAILABE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info	Weight [kg]
PX0907817 CW001.2211.830.A000	16	OPAL	1700	106	3000K	320 mm	1.90

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info	Weight [kg]
PX0907819 CW001.2211.840.A000	16	OPAL	1750	109	4000K	320 mm	1.90
PX0907822 CW002.2211.830.A000	37	OPAL	3760	102	3000K	440 mm	3.20
PX0907829 CW002.2211.840.A000	37	OPAL	3870	105	4000K	440 mm	3.20
PX0907836 CW003.2211.830.A000	37	OPAL	4030	109	3000K	520 mm	4.30
PX0907843 CW003.2211.840.A000	37	OPAL	4150	112	4000K	520 mm	4.30
PX0907845 CW004.2211.830.A000	37	OPAL	4400	119	3000K	630 mm	7.00
PX0907847 CW004.2211.840.A000	37	OPAL	4530	122	4000K	630 mm	7.00
PX0907850 CW005.2211.830.A000	57	OPAL	6180	108	3000K	800 mm	8.40
PX0907857 CW005.2211.840.A000	57	OPAL	6370	112	4000K	800 mm	8.40
PX0907864 CW006.2211.830.A000	100	OPAL	11880	119	3000K	1065 mm	13.20
PX0907871 CW006.2211.840.A000	100	OPAL	12250	123	4000K	1065 mm	13.20
PX0907875 CW001.2222.830.A000	16	MPRM	1900	119	3000K	320 mm	1.90
PX0907876 CW001.2222.840.A000	16	MPRM	1960	123	4000K	320 mm	1.90
PX0907878 CW002.2222.830.A000	37	MPRM	4210	114	3000K	440 mm	3.20
PX0907885 CW002.2222.840.A000	37	MPRM	4330	117	4000K	440 mm	3.20
PX0907892 CW003.2222.830.A000	37	MPRM	4510	122	3000K	520 mm	4.30
PX0907899 CW003.2222.840.A000	37	MPRM	4650	126	4000K	520 mm	4.30
PX0907903 CW004.2222.840.A000	37	MPRM	4920	133	4000K	630 mm	7.00
PX0907901 CW004.2222.830.A000	37	MPRM	5080	137	3000K	630 mm	7.00

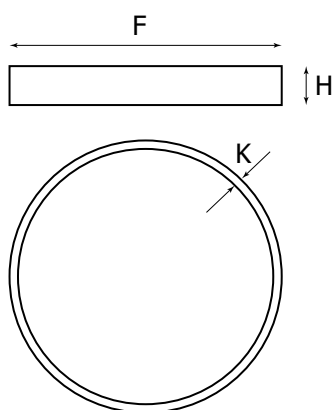

DIMENSIONS

H [mm]	F [mm]	K [mm]	OPAL	MPRM
66	320	13	PX0907817 CW001.2211.830.A000	PX0907875 CW001.2222.830.A000
			PX0907819 CW001.2211.840.A000	PX0907876 CW001.2222.840.A000
66	440	13	PX0907822 CW002.2211.830.A000	PX0907878 CW002.2222.830.A000
			PX0907829 CW002.2211.840.A000	PX0907885 CW002.2222.840.A000
66	520	13	PX0907836 CW003.2211.830.A000	PX0907892 CW003.2222.830.A000
			PX0907843 CW003.2211.840.A000	PX0907899 CW003.2222.840.A000
110	630	13	PX0907845 CW004.2211.830.A000	PX0907903 CW004.2222.840.A000
			PX0907847 CW004.2211.840.A000	PX0907901 CW004.2222.830.A000
110	800	13	PX0907850 CW005.2211.830.A000	
			PX0907857 CW005.2211.840.A000	
110	1065	13	PX0907864 CW006.2211.830.A000	
			PX0907871 CW006.2211.840.A000	

H = Height / Depth | F = Outer diameter | K = Additional dimension

ACCESSORIES

Electric element



Electrical suspension
Pieces in set: 1

PX0922021

Grey

PX0922032

White

Installation element



Finestra Ring 3x Suspension set 1,5m
5x0,75mm2

PX0901955
FS006.22.1500

Grey

PX0901965

White



Ramka GK Finestra Ring

PX0907801
FL001.22.0320

F = 365; H = 67; C,D = 347 [mm]

PX0907808
FL001.22.0440

F = 485; H = 67; C,D = 467 [mm]


PX0907815
FL001.22.0520






F = 565; H = 67; C,D = 547 [mm]

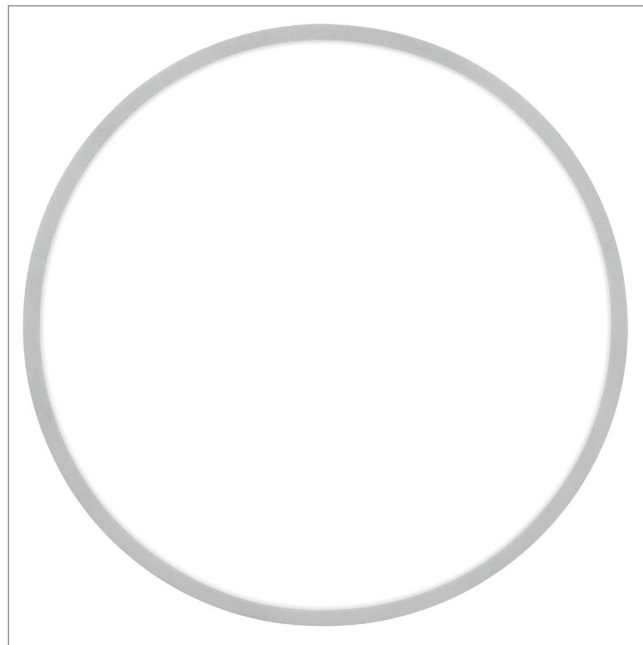

Simple suspension
Pieces in set: 1

PX0922143



Ø 320	H=66mm	
Ø 440	H=66mm	
Ø 520	H=66mm	
<hr/>		
Ø 630	H=110mm	
Ø 800	H=110mm	
Ø 1065	H=110mm	