



Finestra Ring LED Premium



Universal plafond for LED light sources.

Materials: Powder painted housing made of aluminum profile (standard color: grey, white, black), base made of steel sheet, OPAL diffuser (PMMA)

Installation: Surface mounted, suspended, with G/K adapter into plaster-cardboard ceiling

Accessories: Suspension set 3x, G/K adapter for plaster-cardboard ceiling

Power: 230V

ELECTRICAL DATA

Light source	LED
Luminaire power	32W
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

MECHANICAL DATA

Type of installation	Universal
Housing material	Aluminum

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
CE	Yes
PZH	Yes
HACCP+	Yes

LIGHT DATA

Luminaire's luminous efficacy	121 lm/W
Light colour	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 54000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	89 %

OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	Transparent
Diffuser material	Opal/mat plastic

AVAILABE VARIANTS

Emergency module	Motion sensor (type)	Luminaire luminous flux [lm]	Colour temperature	Colour	ON/OFF	DALI
-	-	3760	3000K	White	CW007.1111.830.A000	CW007.1111.830.D000
-	MW	3760	3000K	White	CW007.1111.830.A001	CW007.1111.830.D001
EM3h	-	3760	3000K	White	CW007.1111.830.A200	CW007.1111.830.D200
-	-	3870	4000K	White	CW007.1111.840.A000	CW007.1111.840.D000


AVAILABLE VARIANTS

Emergency module	Motion sensor (type)	Luminaire luminous flux [lm]	Colour temperature	Colour	ON/OFF	DALI
-	MW	3870	4000K	White	CW007.1111.840.A001	CW007.1111.840.D001
EM3h	-	3870	4000K	White	CW007.1111.840.A200	CW007.1111.840.D200
-	-	3760	3000K	Grey	CW007.2211.830.A000	CW007.2211.830.D000
-	MW	3760	3000K	Grey	CW007.2211.830.A001	CW007.2211.830.D001
EM3h	-	3760	3000K	Grey	CW007.2211.830.A200	CW007.2211.830.D200
-	-	3870	4000K	Grey	CW007.2211.840.A000	CW007.2211.840.D000
-	MW	3870	4000K	Grey	CW007.2211.840.A001	CW007.2211.840.D001
EM3h	-	3870	4000K	Grey	CW007.2211.840.A200	CW007.2211.840.D200
-	-	3760	3000K	Black	CW007.3311.830.A000	CW007.3311.830.D000
-	MW	3760	3000K	Black	CW007.3311.830.A001	CW007.3311.830.D001
EM3h	-	3760	3000K	Black	CW007.3311.830.A200	CW007.3311.830.D200
-	-	3870	4000K	Black	CW007.3311.840.A000	CW007.3311.840.D000
-	MW	3870	4000K	Black	CW007.3311.840.A001	CW007.3311.840.D001
EM3h	-	3870	4000K	Black	CW007.3311.840.A200	CW007.3311.840.D200

BASIC DATA

Rodzina	Finestra Ring LED
Type	Premium 440mm

DIMENSIONS

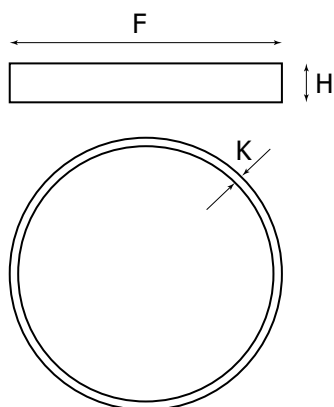

H [mm]	F [mm]
66	440

H = Height / Depth | F =
Outer diameter

ACCESSORIES

Installation element



Finestra Ring 3x Suspension set

FS006.11.1500	1500mm	White
FS006.11.3000	3000mm	White
FS006.22.1500	1500mm	Grey
FS006.22.3000	3000mm	Grey
FS006.33.1500	1500mm	Black
FS006.33.3000	3000mm	Black



