



Latte IP54 LED



Luminaire of increased degree of protection and simple, classic form.

Materials: base made of plastic in white colour. OPAL UV-proof diffuser. IP54 seal.

Installation: Surface mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Plastic

INFORMATION

Colour	White
Operating temperature range	-20 ... 35 °C

CERTIFICATES

Degree of protection (IP)	IP54
Class of protection	I
Light source protection	Yes
CE	Yes
PZH	Yes
HACCP+	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	84
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic


AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info	Weight [kg]
DY001.1111.830.A000 PX1789029	19	1870	98	3000K	330x330	1.70
DY001.1111.840.A000 PX1789036	19	1900	100	4000K	330x330	1.70

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info	Weight [kg]
DY002.1111.830.A000 PX1789001	24	2950	123	3000K	-	2.00
DY002.1111.840.A000 PX1789008	24	3010	125	4000K	-	2.00
DY003.1111.830.A000 PX1789015	46	5680	123	3000K	-	2.60
DY003.1111.840.A000 PX1789022	46	5800	126	4000K	-	2.60

DIMENSIONS

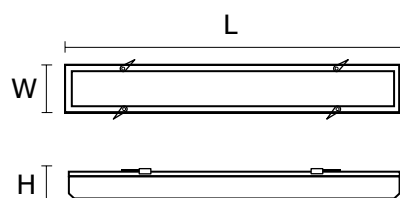

Product code	L [mm]	W [mm]	H [mm]
DY001.1111.830.A000 PX1789029	330	330	85
DY001.1111.840.A000 PX1789036	330	330	85
DY002.1111.830.A000 PX1789001	1160	110	90
DY002.1111.840.A000 PX1789008	1160	110	90
DY003.1111.830.A000 PX1789015	1160	160	90
DY003.1111.840.A000 PX1789022	1160	160	90

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B
DY001.1111.830.A000 PX1789029	90	90
DY001.1111.840.A000 PX1789036	90	90
DY002.1111.830.A000 PX1789001	650	-
DY002.1111.840.A000 PX1789008	650	-
DY003.1111.830.A000 PX1789015	650	-
DY003.1111.840.A000 PX1789022	650	-

A = Spacing length | B = Spacing width