



Latte LED



Classic luminaire with diffuser based on high quality LED light sources for general lighting.

Materials: Powder painted, steel sheet body in white color, OPAL diffuser.

Installation: Ceiling mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
For emergency lighting	Yes
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.96

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet

INFORMATION

Colour	White
--------	-------

CERTIFICATES

Degree of protection (IP)	IP40
Class of protection	I
Light source protection	Yes
Energy class	A++
CE	Yes
EAC	Yes

LIGHT DATA

Color rendering index	83
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	88 %

OPTICAL DATA


Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic

AVAILABE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
PX4090601 DX001.1111.830.A000	13	1810	139	3000K	1.60
PX4090608 DX001.1111.840.A000	13	1870	144	4000K	1.60
PX4090615 DX002.1111.830.A000	26	3640	140	3000K	2.90

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
PX4090622 DX002.1111.840.A000	26	3750	144	4000K	2.90
PX4090629 DX003.1111.830.A000	39	5450	140	3000K	4.20
PX4090636 DX003.1111.840.A000	39	5620	144	4000K	4.20

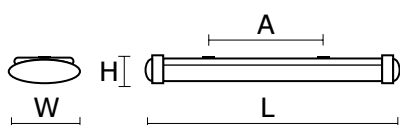

DIMENSIONS

L [mm]	W [mm]	H [mm]	OPAL
600	207	74	PX4090601 DX001.1111.830.A000 PX4090608 DX001.1111.840.A000
1100	207	74	PX4090615 DX002.1111.830.A000 PX4090622 DX002.1111.840.A000
1600	207	74	PX4090629 DX003.1111.830.A000 PX4090636 DX003.1111.840.A000

L = Length | W = Width | H = Height / Depth