



## PN 210 T



Outdoor LED luminaire of IP65 degree of protection. Slim, elegant shape allows to use PN210 as a main lighting for outdoor corridors, underground passageways and arcades. High quality materials are resistant to changing weather conditions and UV radiation. Built-in power supply allows for direct connection to 230V network.

**Materials:** Housing made of die cast aluminum, protected with UV-proof, grey, white or black polyester coating, decorative, transparent polycarbonate diffuser.

**Installation:** Ceiling mounted, wall mounted

**Power:** 230 V

### ELECTRICAL DATA

Light source	LED
Luminaire power	12W
Number of light sources	1
Light source power	12W
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

### MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Die cast aluminum

### CERTIFICATES

Impact resistance	IK08
Class of protection	I
Light source protection	Yes
CE	Yes
ENEC	Yes
EAC	Yes

### LIGHT DATA


Light source luminous flux	1800 lm
Beam angle	120 °
Colour temperature	3000K

### OPTICAL DATA

Diffuser colour	Transparent
Diffuser material	Transparent plastic
Reflector	High gloss

### AVAILABLE VARIANTS

Product code	Light source power [W]	Colour
IV138001	1×12	Black
IV138003	1×12	Grey
IV138004	1×12	White

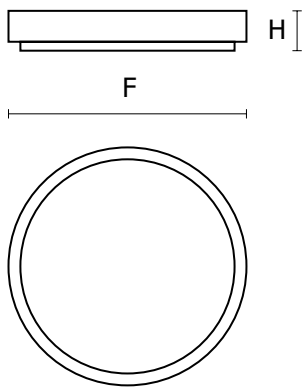

## DIMENSIONS

H [mm]	F [mm]
30	210

H = Height / Depth | F = Outer diameter