

Roma IP54 LED



Series of luminaires recommended for rooms where increased IP protection degree is required. Luminaire dedicated for installation in 600x600 ceiling with visible grid and with OPAL diffuser.

Materials: Powder painted housing made of galvanized steel sheets (standard color: white), OPAL diffuser made of polycarbonate

Installation: suspended 600x600 ceilings with visible supporting frame

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

MECHANICAL DATA

Type of installation	For 600x600 ceiling
Housing material	Steel sheet

INFORMATION

Colour	White
Operating temperature range	0 ... 35 °C

CERTIFICATES

Degree of protection (IP)	IP54
Degree of protection (IP) / top/	IP20
Class of protection	I
CE	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	84
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %


OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic

AVAILABE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info	Weight [kg]
PX3715350 CF001.1111.830.A000	38	4120	108	3000K	600x600	4.60
PX3715358 CF001.1111.840.A000	38	4250	112	4000K	600x600	4.60
PX3715366 CF002.1111.830.A000	43	4380	102	3000K	300x1200	5.40
PX3715374 CF002.1111.840.A000	43	4520	105	4000K	300x1200	5.40

DIMENSIONS

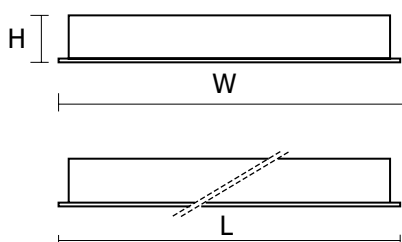

Product code	L [mm]	W [mm]	H [mm]
PX3715350 CF001.1111.830.A000	595	595	80
PX3715358 CF001.1111.840.A000	595	595	80
PX3715366 CF002.1111.830.A000	295	1195	80
PX3715374 CF002.1111.840.A000	295	1195	80

L = Length | W = Width | H = Height / Depth