



Soul



Street luminaires for discharge lamps. Application: street and sidewalks lighting, squares, parking lots, parks etc.

Materials: Housing made of die cast aluminum protected by the thermosetting polyester coating, reflector made of polished aluminum with purity of 99,85%, 4mm thick tempered glass.

Installation: Pole mounted, 4 positions of arrangement in range of 0-15°.

Power: 230 V

ELECTRICAL DATA

Number of light sources	1
Type of equipment	VVG
Ingiter included	Yes
Voltage rating	220 ... 240 V

MECHANICAL DATA

Type of installation	Pole mounted
Housing material	Die cast aluminum

INFORMATION

Colour	Anthracite
--------	------------

CERTIFICATES

Degree of protection (IP)	IP65
Impact resistance	IK10
Class of protection	II
Light source protection	Yes
CE	Yes
EAC	Yes

LIGHT DATA

Light distribution	DI
--------------------	----


OPTICAL DATA

Louver/ shutter	SH
Diffuser colour	Transparent
Diffuser material	Transparent glass
Reflector	High gloss

AVAILABE VARIANTS

Product code	Light source	Lamp holder	Light source power [W]	Weight [kg]
CL505123.170	HIT/HST	E27	1×70	7.95
CL505123.115	HST	E40	1×150	8.80
CL505223.115	HIE	E27	1×150	8.70

DIMENSIONS

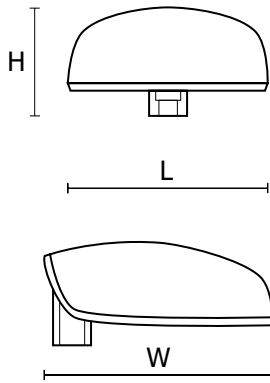

L [mm]	W [mm]	H [mm]
499	430	232

L = Length | W = Width | H = Height /
Depth