


Installation instructions
VIP G/K IP44 LED







220-240V/50-60Hz
LED

Power [W]	L [mm]	Installation hole [mm]	Distance between brackets [mm]	Weight [kg]
13	615	595x70	525	1,5 kg
19	905	885x70	645	2,2 kg
25	1195	1175x70	935	2,9 kg

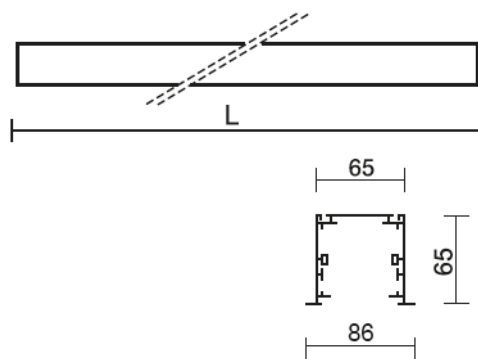

- Deactivate power in the circuit which the luminaire is going to be connected to.
- Carefully take the luminaire out of the package, remove the luminaire end cap.
- Slide out the diffuser and detach the LED module fixed with magnets.
- Install the luminaire end cap.
- Cut out an installation hole in the ceiling and space the brackets as indicated in the table above
- Pull the feeding cable through the hole in the luminaire.
- Put the bracket screws into the holes in the luminaire and screw it to the ceiling.
- Connect the feeding cable as indicated on the power terminal.
- Connect the LED source cables to the terminal as indicated on the picture.
 Pay special attention to the poles while connecting the cables.
 (ATTENTION: reverse connection may damage the LED sources.)
- Reattach the plate with the LED module;
- Fix the diffuser to the luminaire.

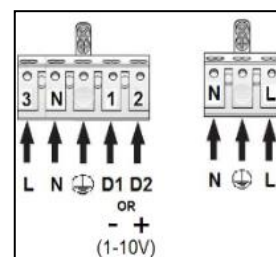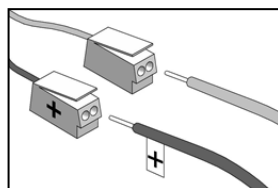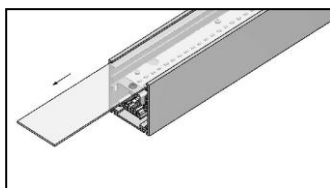

Important warnings:

The luminaires may be installed by qualified registered personnel only. Any manipulation inside the luminaires when the power is activated causes the risk of electrical shock.

The manufacturer is not responsible for any flaws resulting from non-compliance with these instructions. The manufacturer reserves the right to change the construction of the luminaire. Do not install the luminaire in places without sufficient air circulation. To guarantee safe luminaire functioning, please follow the installation instructions.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remind obligations towards separate collection. For correct disposal, please use authorized waste disposal facilities or return to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting to the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

