



Finestra Q LED Premium



Energy-saving decorative lighting luminaire of modern and elegant shape equipped with LED light source from renowned producers. FINESTRA Q LED by universal form and type of assembly is suitable for public spacer, conference rooms, offices, communications, halls, stairways. The first-class AC power supply of renowned brands achieves $\cos \phi > 0,96$. This luminaire perfectly complements to the rest of the Finestra series of luminaires.

Materials: Steel sheet body, electrostatically painted (standard color: grey) OPAL diffuser.

Installation: Surface mounted, wall mounted, suspended

Accessories: Simple and electric suspension

Power: 230V

ELECTRICAL DATA

Light source	LED
Luminaire power	23W
Light source power	21W
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.96

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet

INFORMATION

Operating temperature range	-20 ... 40 °C
-----------------------------	---------------

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
CE	Yes
Power Flicker	=< 3%

LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 56000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	89 %

OPTICAL DATA


Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal plastic

AVAILABLE VARIANTS

Product code	Power supply/ type	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Colour
EK005.1111.830.A000	ON/OFF	3130	136	3000K	White
EK005.1111.830.D000	DALI	3130	136	3000K	White
EK005.1111.840.A000	ON/OFF	3200	139	4000K	White

AVAILABLE VARIANTS

Product code	Power supply/ type	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Colour
EK005.1111.840.D000	DALI	3200	139	4000K	White
EK005.2211.830.A000	ON/OFF	3130	136	3000K	Grey
EK005.2211.830.D000	DALI	3130	136	3000K	Grey
EK005.2211.840.A000	ON/OFF	3200	139	4000K	Grey
EK005.2211.840.D000	DALI	3200	139	4000K	Grey
EK005.3311.830.A000	ON/OFF	3130	136	3000K	Black
EK005.3311.830.D000	DALI	3130	136	3000K	Black
EK005.3311.840.A000	ON/OFF	3200	139	4000K	Black
EK005.3311.840.D000	DALI	3200	139	4000K	Black

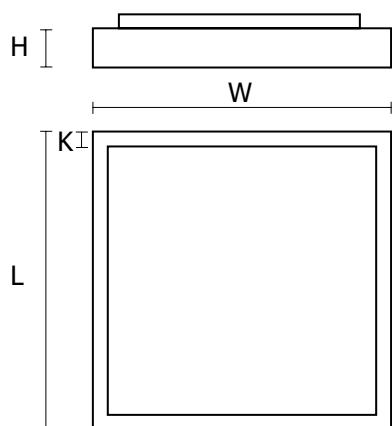

DIMENSIONS

L [mm]	W [mm]	H [mm]	J [mm]
407	407	65	25

L = Length | W = Width | H = Height / Depth | J = Additional dimension



