



## Point NT LED



Nowoczesny projektor na źródła LED COB. Zakres pracy względem osi poziomej wynosi 350°, a pionowej 90°.

**Materials:** body made of aluminum. Faceted reflectors in polycarbonate with mirror finish

**Installation:** surface mounted

**Power:** 230 V

### ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

### MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Aluminum
Electrical track connection	Yes

### INFORMATION

Operating temperature range	0 ... 35 °C
Rotated model	Yes

### CERTIFICATES

Degree of protection (IP)	IP20
Degree of protection (IP) / top/	IP20
Class of protection	I
Energy class	A+
CE	Yes
EAC	Yes

### LIGHT DATA

Luminaire's luminous efficiency	69 %
Light colour	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 60000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	91 %

### OPTICAL DATA

Reflector	High gloss
-----------	------------


### AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Beam angle [°]	Colour temperature	Colour
PX4101001	15	1320	88	20	3000K	White
PX4101022	15	1360	91	20	4000K	White
PX4101043	15	1300	87	45	3000K	White
PX4101064	15	1340	89	45	4000K	White
PX4101008	21	1810	86	20	3000K	White

## AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Beam angle [°]	Colour temperature	Colour
PX4101029	21	1870	89	20	4000K	White
PX4101071	21	1830	87	45	4000K	White
PX4101050	21	1770	84	45	3000K	White
PX4101015	29	2460	85	20	3000K	White
PX4101036	29	2540	88	20	4000K	White
PX4101057	29	2410	83	45	3000K	White
PX4101078	29	2490	86	45	4000K	White
PX4101085	15	1320	88	20	3000K	Black
PX4101106	15	1360	91	20	4000K	Black
PX4101127	15	1300	87	45	3000K	Black
PX4101148	15	1340	89	45	4000K	Black
PX4101092	21	1810	86	20	3000K	Black
PX4101113	21	1870	89	20	4000K	Black
PX4101134	21	1770	84	45	3000K	Black
PX4101155	21	1830	87	45	4000K	Black
PX4101099	29	2460	85	20	3000K	Black
PX4101120	29	2540	88	20	4000K	Black
PX4101141	29	2410	83	45	3000K	Black
PX4101162	29	2490	86	45	4000K	Black

## DIMENSIONS

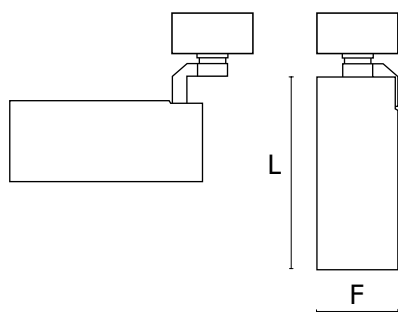

L [mm] | F [mm]

180 | 80

L = Length | F = Outer diameter

## MOUNTING HOLES

B

45

B = Spacing width

## ACCESSORIES

### Optical element



Point LED Shutter honeycomb  
Pieces in set: 1

PX4089260

Black